



FACT SHEET

Sunnycrest Park Arena Parking Lot

Project Description: The project will take place at the existing surface parking lot located at the Sunnycrest Park Arena, adjacent to Henninger High School.



The existing asphalt surface will be replaced with porous asphalt parking spaces in the center section of the main parking area and along the outer parking stalls of the baseball field. In addition, the project will include enhanced street plantings (28 trees) and two bioretention areas designed to capture flow from the standard pavement portion of the parking lot.

The Sunnycrest Arena Parking Lot Project is one of the most cost-effective green parking lot projects in the Save the Rain program. Estimated capture is close to 2 million gallons annually.

Project:	Sunnycrest Arena Lot
Project Owner:	Syracuse Parks Dept.
Project Location:	Robinson St.
Sewershed:	Clinton /Lower MIS
GI Technology:	Porous Pavement, Bioretention
Capture Area:	107,000 sq. ft.
Run-off Reduction:	1,876,000 gal/yr
Year Completed:	2011
Construction Cost:	\$407,000
Prime Contractor:	Ruston Paving



Conditions Prior to Green Project

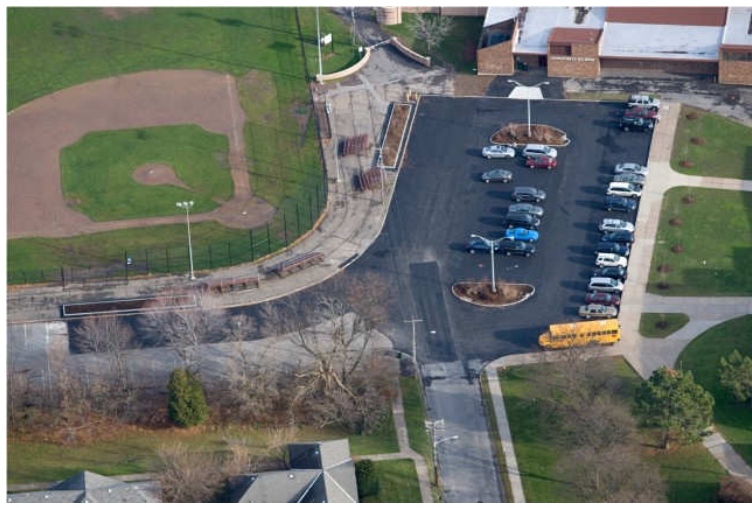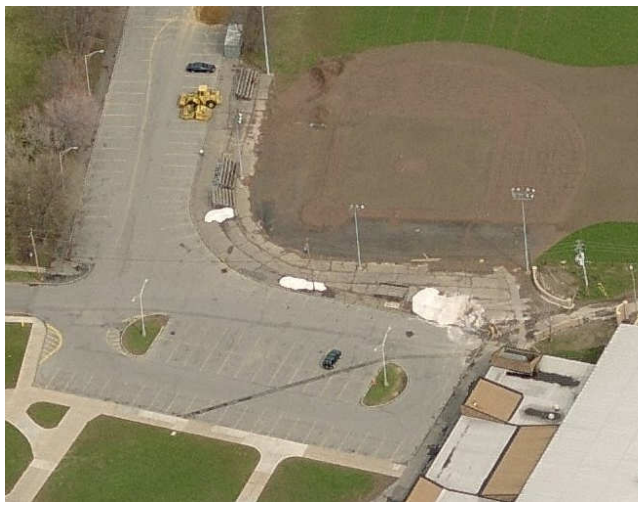

Aerial Photos of Sunnycrest Arena Parking Lot – Before Construction (Left) and After Construction (Right)