



FACT SHEET

OnCenter Municipal Parking Garage


Project Description: The OnCenter Municipal Parking Garage Project will take place at the municipal parking garage to the east of the historic OnCenter/War Memorial Arena. The OnCenter is home to countless entertainment attractions for local, regional, and national audiences. Since 1992, the OnCenter has been the premiere convention location for the region.

The project involves the design and construction of rain gardens on the existing landscape surrounding the garage. This new bio-retention feature will capture and infiltrate the stormwater runoff coming from the existing roof leaders and pipe/downspout infrastructure of the parking garage facility. Disconnecting this existing infrastructure from the conventional sewer system will result in the capture of approximately 1.3 million gallons of stormwater annually.

Project:	OnCenter Parking Garage
Project Owner:	Onondaga County
Project Location:	817-835 S. State Street
Sewershed:	Clinton/Lower MIS
GI Technology:	Bioretention
Capture Area:	72,500 sq. ft.
Run-off Reduction:	1,277,000 gal/yr
Year Constructed:	2011
Construction Cost:	\$246,985
Prime Contractor:	Economy Paving



Aerial View of the OnCenter Garage under Construction (Facing North)

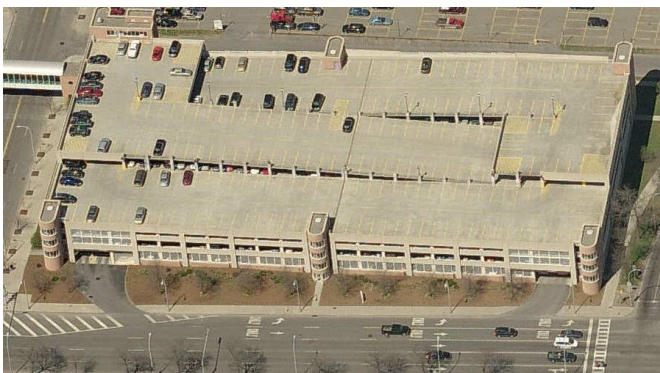

OnCenter Garage Prior to Construction



Construction of a Rain Garden at the OnCenter Garage with Downspout Draining into It

Version 12/28/2011