


Project:	Grand Avenue Road Reconstruction/Sewer Separation
Project Owner:	City of Syracuse
Project Location:	Grand Avenue (Delaware Street to Lydell Street)
Sewershed:	Harbor Brook
CSO:	014/015
GI Technology:	Sewer Separation
Capture Area:	1.15 acres
Runoff Reduction:	1,200,000 gal
Construction Cost:	\$208,911.20
Prime Contractor:	DE Tarolli

FACT SHEET Grand Avenue Road Reconstruction/Sewer Separation

Project Description: The Road Reconstruction project on Grand Avenue further exemplifies the continued partnership between Onondaga County and the City of Syracuse. This project is another example of the City's Department of Public Works partnering with Onondaga County through their road reconstruction program for the inclusion of stormwater management

The existing combined sewer that feeds into the Harbor Brook Interceptor Sewer (HBIS) will have the stormwater separated out and piped directly into the Harbor Brook through two existing outfalls, removing 1.2 million gallons of runoff from the combined sewer system. Additionally, the project will increase available capacity in the HBIS and alleviate hydraulic restrictions downstream. Construction for this project is planned for 2020.

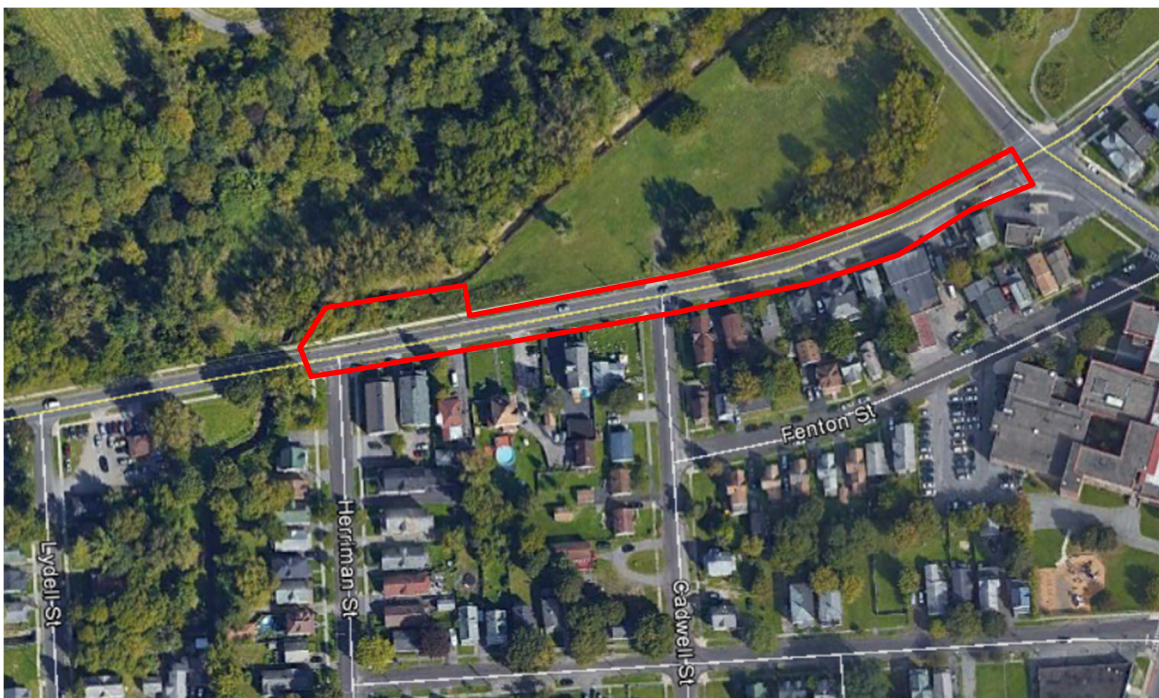

Limits of the Road Reconstruction/Sewer Separation Project on Grand Avenue are outlined in red on the map above